



TECHNICAL FEATURES





KEYSCAN'S SYSTEM VII - REDEFINES ACCESS CONTROL

It is the most versatile access control management software in the security industry. Loaded with all the features and functions that the industry has come to expect from Keyscan. Packaged with Keyscan's renowned reliability to deliver an access control solution that you can depend on 365 days a year.

Whether protecting just a few doors or hundreds of doors, System VII packages ease of use with unprecedented integration and expansion capability.



Innovation has always been the cornerstone for Keyscan. Our dedicated and experienced hardware and software engineers have developed an access control solution founded on quality and reliability. Value is built into every feature and function of System VII, delivering an access solution that is guaranteed to meet end-user needs today and well into the future regardless of the size of the organization.

New York, Toronto, Tokyo and London, whether protecting a single site location or an organization with offices worldwide you can count on Keyscan to deliver world class access control.

SYSTEM VII - SOPHISTICATION WITHOUT COMPLICATION

System VII delivers all the features and functions expected in a premium access control solution but without the complication. Keyscan is known for developing feature rich access control management software that is logical, with ease of use considered for both the end-user and the installing technician.

Seasoned installers, novice users and corporate security directors all rave about the simple yet powerful Keyscan access control management software.

SINGLE PAGE INTERFACE

- System VII's Card holder screen provides the end-user with a single page interface for enrolling and assigning access levels. System VII delivers logically placed information for easy reference and entry.

SINGLE BUTTON HANDICAP FEATURE

- Address the concerns of individuals that may need more time to pass through doors. Simply click the single button handicap feature to apply the handicap timer.

CARD IMPORT FEATURE

- Import card holder information from an existing database or excel file and save on data entry. A CSV file formatted for Keyscan's data structure is all that is required to leverage this efficiency adding tool. Imports may be scheduled to update changes from a human resources database. Allowing end-users to simply manage one database.

LAST CARD TRANSACTIONS

- With System VII, open a card holder file and instantly view the card holders last transactions. A convenient tool to quickly determine if a card holder is in the facility, and where the credential was last used.

21 PERSONNEL FIELDS

- Users are provided 21 fields to record various personnel data such as first name, last name, department, parking spot and special comments. There are 10 completely user definable fields. All fields are searchable for report generation.



ACTIVE MAPPING (OPTION)

The System VII active mapping provides security personnel or system administrators with the extra tools to perform their jobs efficiently and effectively. Active mapping provides visual representation of active sites, with building floor layouts, and annunciates, real-time on screen, door status, alarm points, input status and much more.

- Call up live video straight from the Active map
- Visual alarm point notification
- View on-file photo identification for any entry point
- Manually lock or un-lock doors
- Arm or disarm inputs
- Map drill down functionality





SYSTEM VII - INNOVATION. UNCOMPROMISED.

Microsoft Vista™ Ready

- **SQL Server 2005 Express Database**

System VII provides the latest in database technology behind the Keyscan access control system. 4GB of database storage provides ample historical information for all but the largest installations.

- **Scheduled Database Backups with Email Notification**

Automate database backups with System VII. Configure the day(s) and time for backups to occur and benefit from System VII generated email notifications.

- **2 Levels of Disaster Recovery**

Level I – Recover the Keyscan access control database quickly and efficiently by restoring from a previous database backup.
Level II – Rebuild the Keyscan database by downloading data from the systems access control units.

- **Multi-Monitor Support**

Build impressive building or corporate wide monitoring stations with System VII.

- **Multi-Communication Managers**

Optimize system wide communication speed and performance by running multiple communications managers on a single computer or server. Large sites with many controlled doors will benefit from faster ACU polling times.

- **PC or Server Failures**

Keyscan's access control solution delivers full independent operation without degradation in the event of access control PC or server failure.

- **User Screen Layout Preference**

System VII is designed to recall the user's last screen and access control windows configuration. Whether it is single monitor or multiple monitor get the look and orientation that suits the task.



THE ENTERPRISE SOLUTION

SYSTEM VII – OPTIONAL FULL MICROSOFT SQL DATABASE

Keyscan has designed full SQL capability into the System VII access control management software. Ready when needed, System VII is equipped to support the largest corporate enterprise utilizing the latest in full SQL. Whether the corporation is running Microsoft SQL Workgroup, Standard or Enterprise, System VII has the database upgrade.

SYSTEM WIDE COMMUNICATION - RUNNING AS A SERVICE

System VII by default runs PC to panel communications as an application. For those organizations that require a true server based environment, System VII allows for communications to be installed as a service.

FACILITY LOCK DOWN

Protecting assets and people is serious business. The instant security is breached, institute a facility-wide lock down from any System VII client or reader.

FIRST PERSON IN

Utilize this feature to enforce supervisor or management presence on site before triggering a timezone. Ideal to ensure site protection for unscheduled closures, holidays or to enforce local health and safety requirements.

PRESENT 3

This reader based function allows authorized personnel to toggle timezones, lock & unlock doors for un-scheduled or temporary access or to arm or disarm various alarm inputs such as motion detectors etc.

PC SPECIFICATIONS

Faster processors and higher RAM provide better system performance. For large multi-site systems, please contact Keyscan for proper PC requirements. The following outlines minimum system requirements:

- Recommended Central Processing Unit: Pentium D or later
- Recommended RAM: 1 gigabyte or greater
- Hard Disk: Recommended 20 gigabytes of available space
- USB Port for Photo Badging and Signature Capture
- Com Port: 1 required if direct connect to access control units; 2 required if using CCTV control as well
- CD-ROM or DVD Drive
- Mouse or compatible pointing device
- Removable Media Storage device such as a CD/DVD Writer for database backup
- Network Interface card (NIC) with TCP/IP protocol and a valid active IP address (Database PC must be assigned a static IP Address)
- Graphic Card supporting 1024x768 or higher screen resolution
- Microsoft Internet Explorer 6.0 Service Pack 1 or later
- Microsoft .NET 2.0 Framework






KEYSCAN - UNMATCHED DEPENDABILITY & EXPANSION



MANAGEMENT AND TRANSACTION REPORTS

- Point and click error proof report generation on virtually any and all site activity
- Specify the day and time for the desired report and let System VII take care of the rest.
- Auto email important management reports with no user intervention required.
- Save frequently used report templates
- Ideal for statistical analysis or activity investigations.

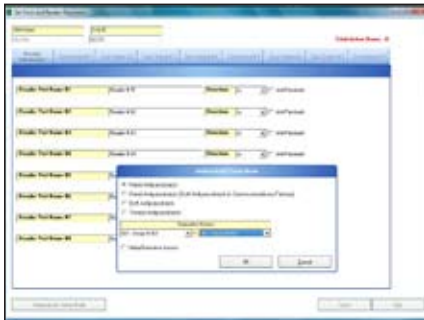

ANTI-PASSBACK

- Prevent security loopholes by implementing card Anti-Passback (APB)
- User selectable APB modes to suit a range of security levels
- Executive access provisions exempt specified groups from the APB restrictions

IOCB1616

- Integrate additional security and building components into the access control system with 16 inputs and 16 outputs per IOCB1616.
- Connect up to four IOCB1616 circuit boards per access control unit.
- Assign multiple input devices such as motion detectors, push buttons, or other sensing devices
- Trigger outputs such as CCTV cameras, alarms, lights, HVAC and other systems
- Schedule activation and de-activation of selected inputs or outputs

(IOCB1616 not supported on CA200)



KEYSCAN'S ACCESS CONTROL UNITS ACCEPT A WIDE VARIETY OF READERS AND READER TECHNOLOGIES.

K-PROX: accepts all 125 kHz HID cards and key fobs and is fully licensed by HID.

HID iClass: These 13.56 MHz smartcards and readers offer built-in encryption to deliver high security and integrity with the convenience of proximity. In addition to the access control application customers have the ability to use additional application areas on the card for other functions, such as cashless vending etc..

INDALA: Indala's 125 kHz proximity readers offer good security with very high reliability and longevity in all environments, including harsh outdoor environments.

HID 125 KHZ PROX SERIES: These are widely available in a variety of bit structures, and are competitively priced.

RF TRANSMITTERS: KEYSCAN's two button and four button transmitters provide excellent convenience combined with security for parking applications. KEYSCAN builds in additional proximity functionality, so that when the driver leaves the vehicle the transmitter fob functions as a prox card on all regular indoor readers. Available in HID and Indala's 125 kHz versions.

BIOMETRIC: there is a wide range of biometric devices available in today's ever-changing marketplace. Whether it's iris, hand or fingerprint, etc. – Keyscan is ready to deliver the highest in security. Keyscan accepts all Biometric readers supporting the industry standard 26 bit Wiegand protocol.

SYSTEM VII SOFTWARE MODULES

K-BADGE - PHOTO BADGING MODULE

System VII Photo Badging Module adds an extra layer of security. This dual purpose optional Module verifies cardholder identities with on-file images and conveniently integrates photobadging within the access control system.



PHOTO VERIFICATION

- Trigger card holder images to appear on-screen upon card presentation
- Compare onscreen photo to actual cardholder
- Ideal for monitoring main access points where security is critical

PHOTO BADGE EDITOR

- Create corporate badges
- Import Logos and backgrounds
- Define printable fields that reference the System VII database such as first name, last name, department and much more.
- Supports and prints industry standard barcode types
- Print ISO card badges with the Evolis Pebble or Dualys printer



VBP407
Single sided card printing



VBP407DBL
Double sided card printing





SYSTEM VII - INTEGRATION SIMPLIFIED

K-TV – CCTV INTEGRATION MODULE

This software module provides the ultimate in integrated security. The incredibly user friendly System VII interface allows for seamless integration with access control and the CCTV platform. Whether the CCTV Platform is RS232, Web-enabled or DVR driven, System VII delivers purpose and function in one clean interface.

Alarm Video Retrieval - Click on an alarm event and immediately view the applicable video. Respond to Alarm events knowing what awaits you.

Live Video Feed - Run the live video feeds directly from System VII. Monitor the ongoing site activity at a glance. With the enhanced Multi-monitor functionality, have live video running on one monitor and the System VII running on another to deliver a true organization command centre.

Historical Video Retrieval - System VII allows you to call up old alarm events and instantly view the associated historical video. Search video by date and time. Simply select the camera and go.

Camera Alarm Presets - Alarm points can be set to trigger the System VII CCTV screen and force the closest camera to the alarm point using defined PTZ presets. Allowing instant viewing of an alarm point without requiring the operator to manually input PTZ commands.

PTZ Control - While viewing live video the operator can choose to manually adjust the PTZ controls within the System VII access control management software. One Application – Total Control.

Multiple CCTV screens - Monitoring multiple cameras or possibly multiple DVRs is no problem for System VII's CCTV integration module. Enjoy the ability to view multiple System VII CCTV screens open simultaneously.



SUPPORTED DVR'S

Bosch Divar, Capture DVR, Dedicated Micros, Digital Watchdog, GE Interlogix, General Solutions, Honeywell Fusion, Open Eye, Pelco, and Toshiba digital video recorders. This list is subject to change without notice as DVR manufacturers may alter specifications. Contact Keyscan to ensure availability of current DVR driver.

K-VIS - VISITOR MANAGEMENT

Keyscan's optional System VII Visitor Module has a full range of automation features for registering and monitoring visitors.

- Schedule visits, track visitor status
- Retain historical records of visitors
- Built in email notification upon visitor arrival
- Interfaces with Keyscan's business card scanner (p/n BIZSCAN)
- Imports contact info directly from MS Outlook™
- Assigns visitor access rights



KEYSCAN ACCESS CONTROL UNITS


CONTROL UNIT FEATURES

- Stores up to 32,000 cards per site with no limit on number of sites
- Create up to 511 door groups and 511 elevator groups
- Retains last 6000 transactions in activity memory buffer
- Create up to 256 time zones, 512 different schedules, and 3 different holiday types
- Create up to 64 holiday dates
- Monitors door forced open and door held open alarm conditions at reader-controlled doors
- Monitors temporary cards with programmable date activation/expiration and/or usage countdown
- Unlimited remote sites via TCP/IP or dial-up modem
- Heavy-duty 10 amp relays for long life and reliability
- Large, well constructed enclosure with ample room for wiring and circuit boards
- Dual processors for enhanced system performance - panels operate during uploading and downloading of data
- Removable terminal blocks for easier installation and service
- Individual reader terminal blocks
- Mix or match access control units for optimum installation
- Simple jumper settings for most Wiegand protocols
- Programs daylight savings and standard time to change automatically
- 2 year warranty



KEYSCAN ACCESS CONTROL UNITS

Mix and match Keyscan's line-up of access control units to optimize system design and improved system installation. From a 2 door to a 200 plus door system Keyscan Access control is designed for total scalability, flexibility and reliability!

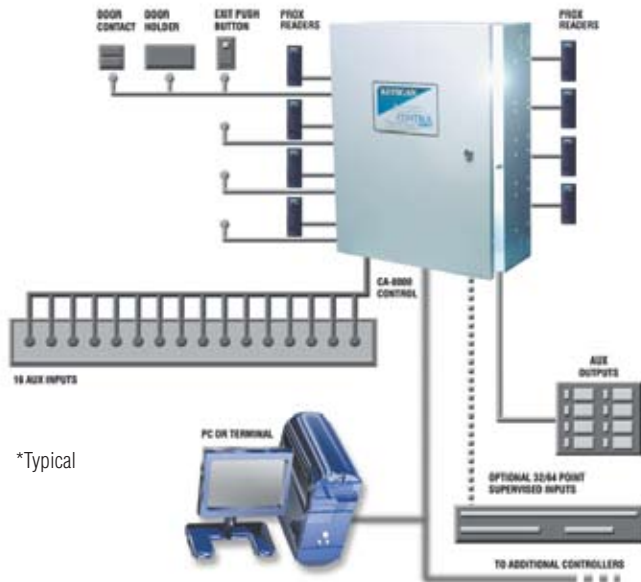

CA 200 Access Control Unit	CA 4000 Access Control Unit	CA 8000 Access Control Unit	EC1000/2000 Elevator Control Unit
2 Readers or Keypads	4 Readers or Keypads	8 Readers or Keypads	1 Elevator cab up to 40 floors (EC1000)
8 Alarm inputs	16 Alarm inputs	16 Alarm inputs	2 Elevator cabs up to 16 floors each (EC2000)
2 time-programmable outputs	8 time-programmable outputs	8 time-programmable outputs	2 readers or keypads for dual elevator systems
	Up to 64 programmable supervised inputs	Up to 64 programmable supervised inputs	Permits cardholder access to single or multiple floors
	Up to 64 programmable supervised outputs	Up to 64 programmable supervised outputs	*for additional floor control add OCB's
Built-in power supply for Readers	Built-in power supply for Readers	Built-in power supply for Readers	Built-in power supply for Readers

COMPREHENSIVE FACTORY TRAINING AND WEBINARS

Keyscan offers comprehensive factory training courses and product exclusive webinars. Visit www.keyscaan.ca for specific factory training and webinar dates.






SYSTEM VII - SCALABILITY, RELIABILITY, FLEXIBILITY.

Whether installing a base Keyscan System or an enterprise wide access control solution with hundreds of doors and multiple buildings or sites, Keyscan has the solution. Limitless expansion, based on a flexible panel communications platform delivers reliable, consistent performance. In the event of a network failure, rest assured that every Keyscan access control panel has the ability to run independently with no performance degradation or security compromises.

BASE KEYSKAN CONFIGURATION

RS232

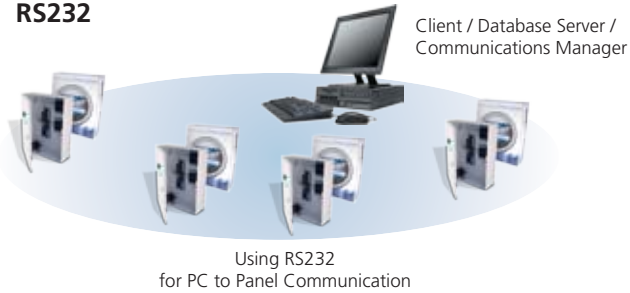

LAN



ENTERPRISE KEYSKAN CONFIGURATION

CORPORATE HEAD OFFICE - CHICAGO




BUILDING 2 - LONDON



BUILDING 3 - NEW YORK



BUILDING "N" - TOKYO

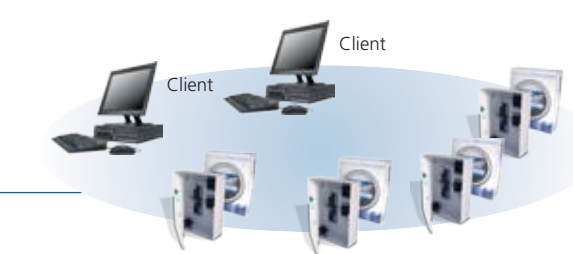

DESIGN HELP

Knowledgeable staff are always ready to assist in the most involved system design.

COMMUNICATION OPTIONS

READER TO ACU

- Reader – 22 AWG 3 pair shielded: maximum 500 feet (152 m)
- Door Lock – 18 AWG 1 pair: maximum 500 feet (152 m) *
- Door Contact – 22 AWG 1 pair: maximum 1000 feet (304.8 m) *
- Request to Exit (RTE) – 22 AWG 3 pair: maximum 1000 feet (304.8) *

Optional communication extenders

*WIEEX extends distance by 4000' on twisted pair

*CWIEEX extends distance by 500' on Coax cable

ACU TO ACU

Option A - CB485

Parallel -22AWG / 4 conductor (CAT5) @ 56K baud: maximum 2000 feet (609m) between ACUs

Option B - CPB-10

Parallel or star – 22 AWG / 4 conductor shielded @19,200 baud: maximum 2000 feet (609 m)

ACU TO PC OPTIONS

1. Serial RS-232 – 22 AWG / 5 conductor shielded: maximum 100 feet (30.5 m)
2. Commex, RS-485, – 22 AWG 2 pair twisted CAT5: maximum 4000 feet (1219.2 m)
3. LAN/WAN (TCP/IP) NETCOM 2 or NETCOM 6 (encrypted)
4. Dial-up Modem
5. USB-SER – RS232/RS485 to USB Adaptor

OPERATING SYSTEMS

Microsoft Vista™ Business, Windows 2000™, Windows 2000 Server™, XP Professional™, Windows 2003 Server™

CONTROL UNIT TECHNICAL SPECIFICATIONS

OPERATING VOLTAGES

Input transformers: 16 VAC, 37-40 VA Class II

Internal Power Supply: 13.5 VDC @ 1.2 amps

Battery Backup: 12VDC 7 Amp/Hr.

COMMUNICATIONS

RS485 with CB-485

Dial-up with CB-485M

TCP/IP with NETCOM2 or CB485 with NETCOM2P

EIA/TIA 562 with CPB-10

ENCLOSURE

Single locking box CEMA / NEMA Type 1

Dimensions: 20 1/4" (51.4cm) H x 16 3/8" (41.6cm) W

x 5 5/8" (14.3cm) D

Net Weight: 15.8 lbs (7.2kg)

OPERATING ENVIRONMENT

32° to 120° F. 0° to 49° C., Humidity: 0% to 90% R.H., non-condensing

READER TECHNOLOGIES

- Proximity
- Contactless Smart Card
- iClass
- Radio Frequency (wireless parking applications)
- Biometrics
- Bar Code
- Mag Stripe

RELAY OUTPUTS

Form C contacts, 10 Amps Max. 24 VAC or 32 VDC

ORDERING OPTIONS

SYSTEM VII

- Premium access control management Software complete with 2 concurrent clients

K-TV

- CCTV module license to enable CCTV & Video control

K-VIS

- Visitor management module for integration with System VII access control management software

K-BADGE

- Photo badging & Verification license

K-CL

- Client license for one additional concurrent user

K-CM

- Security Command module license



OVERVIEW OF THE FEATURES IN EVERY KEYSKAN SYSTEM

PANEL NAME	CA 200	CA 4000	CA 8000	EC 1000	EC 2000
DOOR OUTPUT RELAYS	2	4	8	NA	NA
CARDS	32000	32000	32000	32000	32000
TRANSACTION FILE BUFFER	6000	6000	6000	6000	6000
TIME ZONES	256	256	256	256	256
TIME SCHEDULES	512	512	512	512	512
GROUP LEVELS	511	511	511	511	511
HOLIDAY DATES	64	64	64	64	64
VISITOR CARD	YES	YES	YES	YES	YES
READERS	2	4	8	1	2
KEYPADS	2	4	8	1	2
READER DOOR INPUTS	2	4	8	NA	NA
EXIT BUTTON INPUTS	2	4	8	NA	NA
ALARM OUTPUT RELAYS	2	4	8	NA	NA
AUXILIARY INPUTS	8	16	16	NA	NA
SUPERVISED INPUTS (OPTIONAL)	NA	32/64	32/64	NA	NA
IOCB 1616 SUPERVISED INPUT/OUTPUTS (OPTIONAL)	NA	16-64	16-64	NA	NA
POWER FAIL OUTPUT	YES	YES	YES	NA	NA
ELEVATOR CONTROL	NA	NA	NA	1x40 Flrs	2x16 Flrs
FLOOR MONITOR INPUTS	NA	NA	NA	YES	YES
CONTROL PROCESSORS	2	2	2	2	2
MANUAL RELAY OVERRIDE	YES	YES	YES	YES	YES
INDIVIDUAL TIME ZONES PER DOOR/READER	YES	YES	YES	NA	NA
INDIVIDUAL TIME ZONES PER FLOOR	NA	NA	NA	YES	YES
DIAL-UP MODEM ON REMOTE ALARM	YES	YES	YES	NA	NA
TIME ZONE CONTROL ON KEYPAD/READER USE	YES	YES	YES	NO	NO
MULTI SITE CARD WITH BATCH/FACILITY CODE	YES	YES	YES	YES	YES
SERIAL COMMUNICATION	YES	YES	YES	YES	YES
DIAL-UP COMMUNICATION (OPTIONAL)	YES	YES	YES	YES	YES
LAN/WAN COMMUNICATION (OPTIONAL)	YES	YES	YES	YES	YES
ADD ON SUPPRESSOR KIT REQUIRED	NO	NO	NO	NO	NO

KEYSCAN'S INTEGRATION AND DYNAMICS ALLOWS COMPANIES TO START WITH A SMALL SYSTEM AND GROW TO A FULL NETWORK OF SECURITY AND BUILDING MANAGEMENT.

Keyscan Inc.

901 Burns Street East, Whitby, ON Canada L1N 6A6
 Phone: +1 905.430.7226 Fax: +1 905.430.7275
 Toll Free: +1 888-KEYSCAN (539.7226)
 Web Site: www.keyscan.ca

KEY 2007-03

